

Aurora

Pendant Light




Aurora is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with wide beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.

- Model/Colors** | Available in White & Black.
- Application Areas** | Pendant Light For Indoor Applications.
Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance

Spot		Medium		Flood	
	15°		30°		45°
ft	ø	ft	ø	ft	ø
3.0	0.72	3.0	1.41	3.0	2.03
9.0	2.15	9.0	4.22	9.0	6.09
15.0	3.58	15.0	7.04	15.0	10.15

TECHNICAL PARAMETERS

Voltage	100 - 277 V AC, 50-60 Hz
Light Source	Osram SOLERIQ S 19
Operating Position	No Swiveling Type
Start Time	Instant
Driver	Stand Alone (included)
Optics	Reflective Cup Structure
Beam Spread	Spot, Medium, Flood
Dimming	Triac Dimming / 0-10 V Dimming

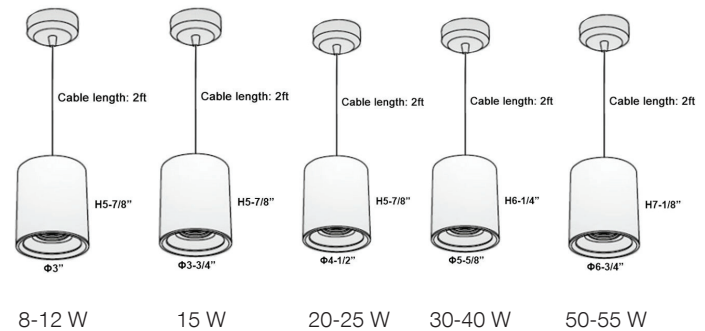

CRI	Power (W)	CCT (K)	Total Lumen Output (lm)	Beam Spread
>90	8 W / 12 W / 15 W / 20 W / 25 W / 30 W / 40 W / 50 W / 55 W	2700	640 / 960 / 1200 / 1600 / 2000 / 2400 / 3200 / 4000 / 4400	15° / 30° / 45°
>90	8 W / 12 W / 15 W / 20 W / 25 W / 30 W / 40 W / 50 W / 55 W	3000	680 / 1020 / 1275 / 1700 / 2125 / 2550 / 3400 / 4250 / 4675	15° / 30° / 45°
>90	8 W / 12 W / 15 W / 20 W / 25 W / 30 W / 40 W / 50 W / 55 W	4000	720 / 1080 / 1350 / 1800 / 2250 / 2700 / 3600 / 4500 / 4950	15° / 30° / 45°
>90	8 W / 12 W / 15 W / 20 W / 25 W / 30 W / 40 W / 50 W / 55 W	5000	760 / 1140 / 1425 / 1900 / 2375 / 2850 / 3800 / 4750 / 5225	15° / 30° / 45°

Note

- Product available in other Kelvin temperatures on request.
- Reflector color: Black/White/Silver option available.
- Ceiling cup standard size: 4-3/4"; Cable standard length: 2ft