

Remus

Pendant Light



Remus is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with different beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.


Model/Colors | Available in White & Black.

Application Areas | Track Light for Indoor Applications.

TECHNICAL PARAMETERS

Voltage	100 - 277 V AC, 50-60 Hz
Light Source	Osram SOLERIQ S 19
Operating Position	Swiveling Type
Start Time	Instant
Driver	Stand Alone (included)
Beam Spread	Spot, Medium, Flood
Dimming	Triac Dimming

Spot		Medium		Flood	
	11°		24°		36°
ft	ø	ft	ø	ft	ø
3.0	0.72	3.0	1.41	3.0	2.03
9.0	2.15	9.0	4.22	9.0	6.09
15.0	3.58	15.0	7.04	15.0	10.15

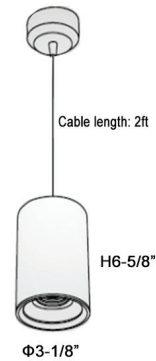

CRI	Power (W)	CCT (K)	Total Lumen Output (lm)	Beam Spread (Options)	Finish
>90	20 W	2700	1800	11° / 24° / 36°	White / Black
>90	20 W	3000	1900	11° / 24° / 36°	White / Black
>90	20 W	4000	2000	11° / 24° / 36°	White / Black
>90	20 W	5000	2100	11° / 24° / 36°	White / Black

Note

- Product available in other Kelvin temperatures on request.
- Ceiling cup standard size: 4-3/4".
- Cable standard length: 2.