


Gleam Downlight

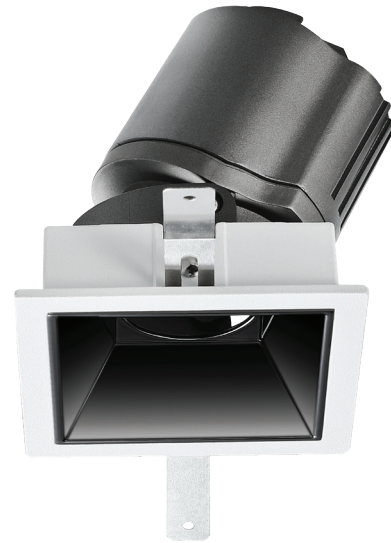

Gleam, a square shaped LED downlight is made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink that ensure high-durability. The specular darklight reflector in this store light allows outstanding visual comfort to the visitors so that they are able to explore the merchandise with ease.


Model/Colors | Available In White And Black.

Application Areas | Guest Room, Corridor, Restaurant, Meeting Room
Club, Hall, Hotel Entrance

Spot		Medium		Flood		Wide Flood	
15°		24°		38°		60°	
ft	ø	ft	ø	ft	ø	ft	ø
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15
9.0	2.15	9.0	4.22	9.0	6.09	9.0	9.45
15.0	3.58	15.0	7.04	15.0	10.15	15.0	15.75

TECHNICAL PARAMETERS

Voltage	100 - 277 V AC, 50-60 Hz
Light source	Osram SOLERIQ S 19
Operating Position	Swiveling Type
Start time	Instant
Driver	Stand Alone (included)
Optics	Darklight Technology Black, Silver
Dimming	On-Off / Triac / 0-10 V

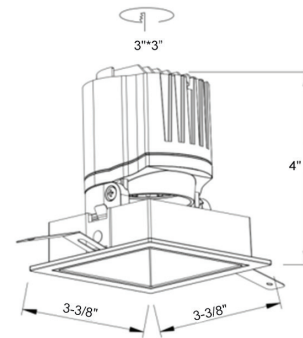

CRI	Power (W)	CCT (K)	Total Lumen Output (lm)	Beam Spread (Options)	Finish
>90	12 W / 20 W / 30 W / 35 W	3000 K	1520 / 2530 / 3800 / 4430	15° / 24° / 38° / 60°	Black / White
>90	12 W / 20 W / 30 W / 35 W	4000 K	1600 / 2660 / 4000 / 4660	15° / 24° / 38° / 60°	Black / White
>90	12 W / 20 W / 30 W / 35 W	5000 K	1680 / 2800 / 4200 / 4900	15° / 24° / 38° / 60°	Black / White

Note

1. Product available in other Kelvin temperatures on request.