


Glim

Downlight



Glim, a round shaped LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB.




Model/Colors | Available in White & Black.

Application Areas | Outdoor Corridor, Bathroom, Eave.

TECHNICAL PARAMETERS

Voltage	100 - 277 V AC, 50-60 Hz
Light Source	Osram SOLERIQ S 19
Operating Position	Non - Swiveling Type
Start Time	Instant
Driver	Stand Alone (included)
Optics	Darklight Technology Black, Silver
Dimming	On-Off / Triac / 0-10 V

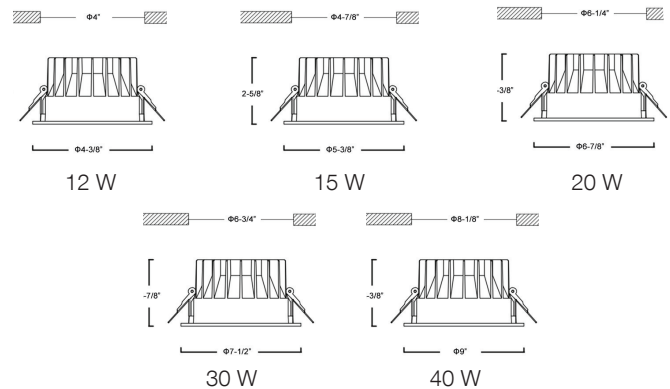

CRI	Power (W)	CCT (K)	Total Lumen Output (lm)	Beam Spread (Options)	Finish
>90	12 W / 15 W / 20 W / 30 W / 40 W	2700 K	1440 / 1800 / 2400 / 3600 / 4800	60°	White / Black
>90	12 W / 15 W / 20 W / 30 W / 40 W	3000 K	1520 / 1900 / 2530 / 3790 / 5050	60°	White / Black
>90	12 W / 15 W / 20 W / 30 W / 40 W	4000 K	1600 / 2000 / 2660 / 4000 / 5320	60°	White / Black
>90	12 W / 15 W / 20 W / 30 W / 40 W	5000 K	1680 / 2100 / 2800 / 4200 / 5600	60°	White / Black

Note

1. Product available in other Kelvin temperatures on request.