

# Lumos

## Downlight



Circular in design, this LED downlight is made up of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Available in multiple wattages and beam angle, the luminaire renders greater flexibility in its application for store lighting. Moreover, the specular darklight reflector in this store light allows outstanding visual comfort to the visitors.


**Model/Colors** | Available in white and black.

**Application Areas** | Guest Room, Corridor, Restaurant, Meeting Room  
Club, Hall, Hotel Entrance

Spot		Medium		Flood		Wide Flood	
	15°		24°		38°		60°
ft	ø	ft	ø	ft	ø	ft	ø
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15
9.0	2.15	9.0	4.22	9.0	6.09	9.0	9.45
15.0	3.58	15.0	7.04	15.0	10.15	15.0	15.75

### TECHNICAL PARAMETERS

<b>Voltage</b>	100 - 277 V AC, 50-60 Hz
<b>Light Source</b>	Osram SOLERIQ S 19
<b>Operating Position</b>	Non-Swiveling Type
<b>Start Time</b>	Instant
<b>Driver</b>	Stand Alone (included)
<b>Optics</b>	Darklight Technology Black, Silver
<b>Dimming</b>	On-Off / Triac / 0-10 V

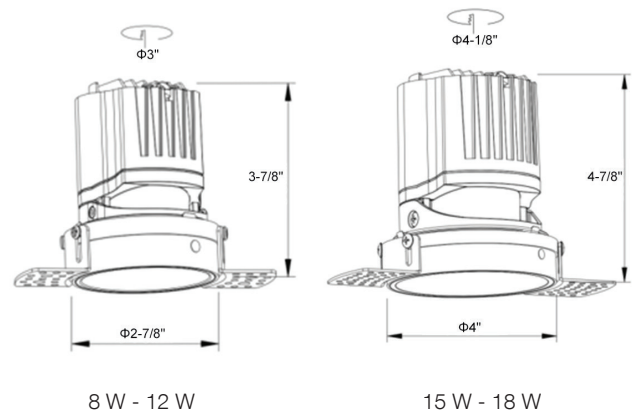

CRI	Power (W)	CCT (K)	Total Lumen Output (lm)	Beam Spread (Options)	Finish
>90	8 W / 12 W / 15 W / 20 W	3000 K	1010 / 1520 / 1900 / 2530	15° / 24° / 38° / 60°	Black / White
>90	8 W / 12 W / 15 W / 20 W	4000 K	1060 / 1600 / 2000 / 2660	15° / 24° / 38° / 60°	Black / White
>90	8 W / 12 W / 15 W / 20 W	5000 K	1120 / 1680 / 2100 / 2800	15° / 24° / 38° / 60°	Black / White

### Note

1. Product available in other Kelvin temperatures on request.