

# Ocul

## Downlight



Ocul, a round shaped LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB.


**Model/Colors** | Available in White.

**Application Areas** | Classroom, Meeting Room, Office, Club, Home.

Spot		Medium		Flood		Wide Flood	
	15°		24°		36°		60°
ft	ø	ft	ø	ft	ø	ft	ø
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15
9.0	2.15	9.0	4.22	9.0	6.09	9.0	9.45
15.0	3.58	15.0	7.04	15.0	10.15	15.0	15.75


### TECHNICAL PARAMETERS

<b>Voltage</b>	100 - 277 V, AC, 50-60Hz
<b>Light Source</b>	Osram SOLERIQ S 19
<b>Operating Position</b>	Non - Swiveling Type
<b>Start Time</b>	Instant
<b>Driver</b>	Stand Alone (included)
<b>Optics</b>	Darklight Technology Black, Silver
<b>Dimming</b>	On-Off / Triac / 0-10 V

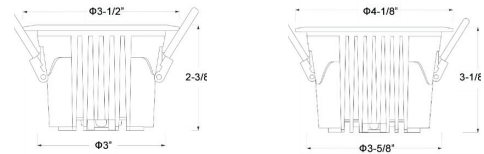

10 W

15 W

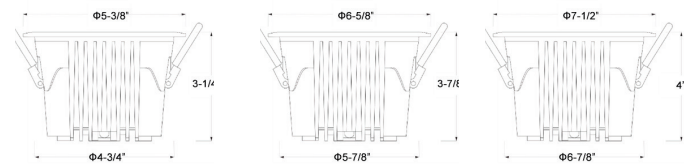

20 W

30 W - 40W

50 W

CRI	Power (W)	CCT (K)	Total Lumen Output (lm)	Beam Spread (Options)	Finish
>90	10 W / 15 W / 20 W / 30 W / 40 W / 50 W	2700 K	1200 / 1800 / 2400 / 3600 / 4800 / 6000	15° / 24° / 36° / 60°	White
>90	10 W / 15 W / 20 W / 30 W / 40 W / 50 W	3000 K	1264 / 1895 / 2527 / 3790 / 5054 / 6318	15° / 24° / 36° / 60°	White
>90	10 W / 15 W / 20 W / 30 W / 40 W / 50 W	4000 K	1330 / 2000 / 2660 / 3990 / 5320 / 6650	15° / 24° / 36° / 60°	White
>90	10 W / 15 W / 20 W / 30 W / 40 W / 50 W	5000 K	1400 / 2100 / 2800 / 4200 / 5600 / 7000	15° / 24° / 36° / 60°	White

### Note

- Product available in other Kelvin temperatures on request.
- Reflector Colour- Black, White, Silver, Golden available.
- SMD can improve lumen efficiency to 120-130 lm/W by adding extra cost.